




INTEGRATED ALL-GLASS SYSTEMS GEZE IGG  
INTELLIGENCE BETWEEN THE PANES

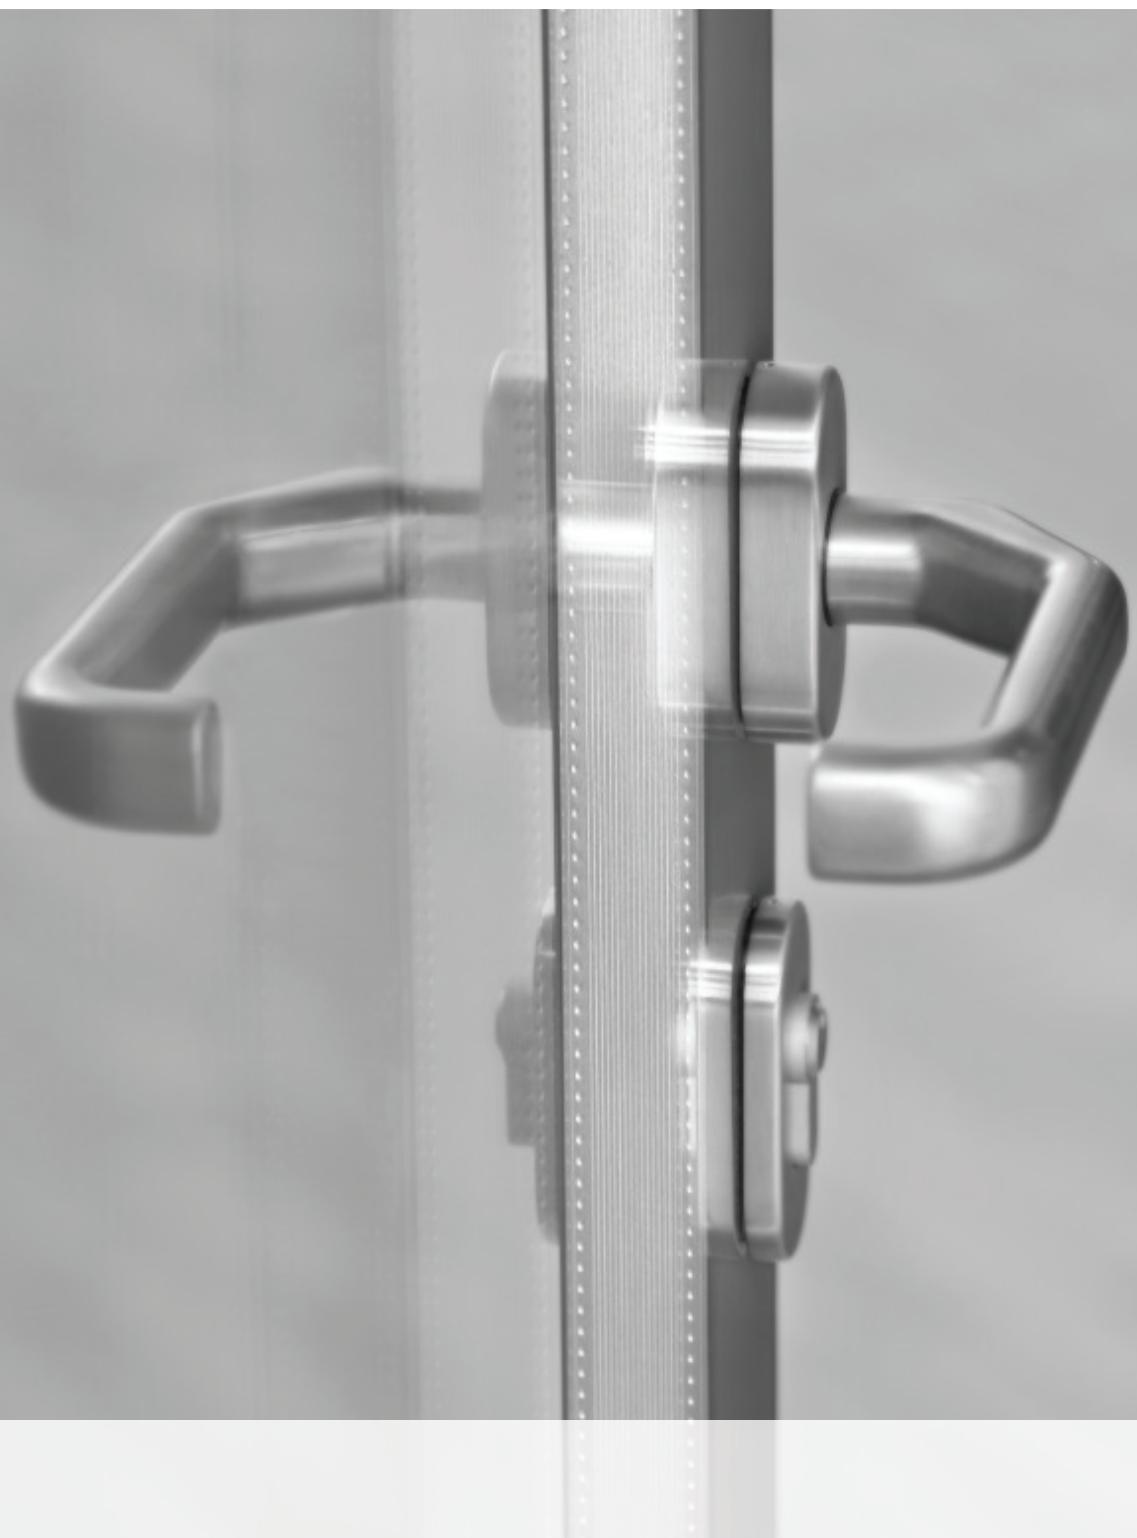

## CONTENTS

Solutions for all-glass systems – GEZE IGG	4
Automatic sliding and telescopic sliding doors GEZE Slimdrive SL NT resp. SLT mit IGG	5
Manual sliding wall systems GEZE MSW with IGG	7
Manual sliding doors GEZE Perlan 140 with IGG	8
IGG Double-action doors	10
IGG Single-action doors	11

## GEZE IGG – Solutions for all-glass systems

### Intelligence between the panes

Glass, besides timber and bricks, is one of the oldest building materials of mankind. Even today glass is still used - with upward tendency -, especially with regards to economical and ecological aspects. More than ever we take advantage of the outstanding physical properties of glass such as hardness, elasticity and the coefficient of heat transmission. Thus new and transparent living areas are created for people, animals and plants - without the need to make concessions to flexibility, protection, warmth or comfort. Modern production processes and hardware systems take an important share in this development.

GEZE IGG means that the profiles and hardware system are invisibly integrated in a gap of only 27 mm between two panes – without any protruding visible parts on the glass surface. A perimeter printing on the interior side of the panes makes the fittings completely invisible to the human eye. Wherever fittings and profiles spoiled the aesthetic appearance of glass elements in the past, GEZE IGG will allow freedom in design in future. The continuous design of façades can now be realised without incongruity of style, irrespective of whether sliding partitions, sliding doors, single-action or double-action doors are planned.



### GEZE IGG SYSTEMS

#### Range of application

- For interior and exterior installations
- Automatic and manual sliding doors
- Manual sliding wall systems
- Automatic and manual hinged doors


#### Structure of the elements

- Exterior pane (types of glass: toughened safety glass ESG-H or laminated glass VSG of ESG)
- Spacer
- Holding profiles for the fittings
- Interior pane (types of glass: toughened safety glass ESG-H or laminated glass VSG of ESG)
- Perimeter printing of the panes (min. width 30 mm)
- Perimeter printing in the gap between the panes
- Gap between the panes SZR 27 mm

## GEZE Slimdrive SL NT/SL NT-FR and SLT/SLT-FR with IGG

### Advanced design owing to optimised technology

GEZE Slimdrive SL stands for optimised sliding door technology. With a construction height of only 7 cm this driving system convinces by perfection, requiring only a minimum of space: control with 16 bit high-performance micro processor, various setting possibilities, high reliability with all function being maintained etc.

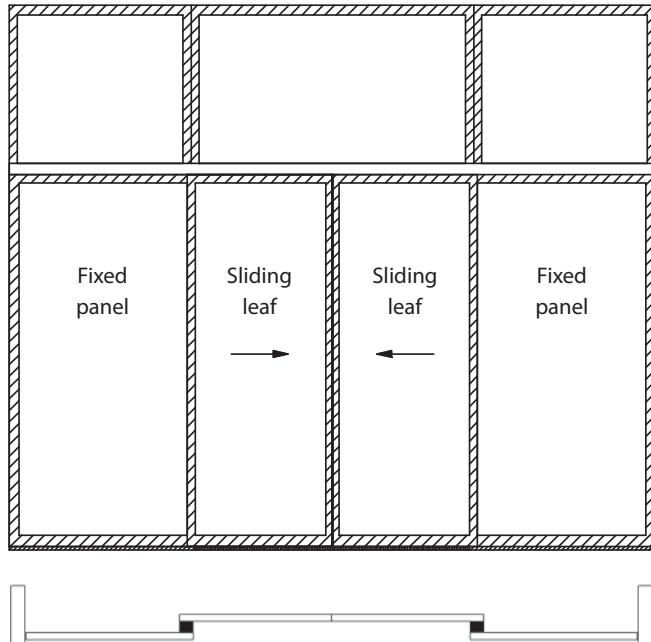

### Product features


The reduction of the technology to the essential moreover offers considerable ecological and economical advantages:

- Environmentally friendly due to economical and ecological use of material and energy
- Tailored-to-size system production
- Simple, quick installation and adjustment
- Safe maintenance diagnosis

The Slimdrive SL (SLT for sliding doors with telescoping opening) is a fully modular, all-aluminium construction system and consists of mounting profile, track profile, cover and side parts.

The drive simply disappears in the façade thus creating transparency and consequent aesthetics. Beam extensions and mullion profiles are a thing of the past. What you get instead: frameless door leaves – without any compromises.

- Small dimensions: 70 mm x 188 mm (height x depth)
- All components are pluggable
- The drive unit is completely prefabricated
- The supply unit can be flanged to the guide rail without drilling

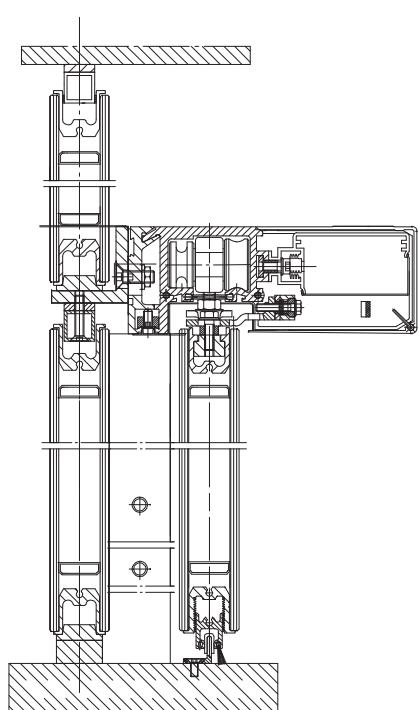

**Simple mounting – flexible use**

All components and the cover can be fitted from behind. The Slimdrive SL is suitable for column and beam mounting to almost all common façade profiles as well as for wall and ceiling installation owing to corresponding adapters.


- Slimdrive SL NT-FR and SLT-FR are approved for the use on escape and rescue routes

**TECHNICAL DATA**

	Slimdrive SL NT/SL NT-FR	Slimdrive SLT/SLT-FR
Opening width	single-leaf max. 2000 mm double-leaf max. 3000 mm	max. 3000 mm 1600 – 3600 mm
Max. leaf weight	single-leaf 120 kg double-leaf 2 x 120 kg	2 x 80 kg 4 x 70 kg
Opening speed (double-leaf with 2 x 100 kg)	max. 0,7 m/s	max. 0,7 m/s
Closing speed	max. 0,4 m/s	max. 0,4 m/s
Height of door leaf	up to approx. 3000 mm	up to approx. 3000 mm
Door leaf IGG system	with concealed fittings	

**IGG limits of application**


Max. weight of element	fixed panel sliding leaf Slimdrive SL sliding leaf Slimdrive SLT	200 kg 120 kg 70/80 kg
Max. side ratio	process-inherent optimum running smoothness Slimdrive SL max. for Slimdrive SL and SLT	1 : 5 1 : 3 1 : 4
Max. admissible deflection	8 mm oder 1/200	
Standard values	weight per unit area for 2 x ESG 6 (IGG standard) weight per unit area for 2 x ESG 8 (1 side > 3000 mm)	34 kg/m <sup>2</sup> 44 kg/m <sup>2</sup>

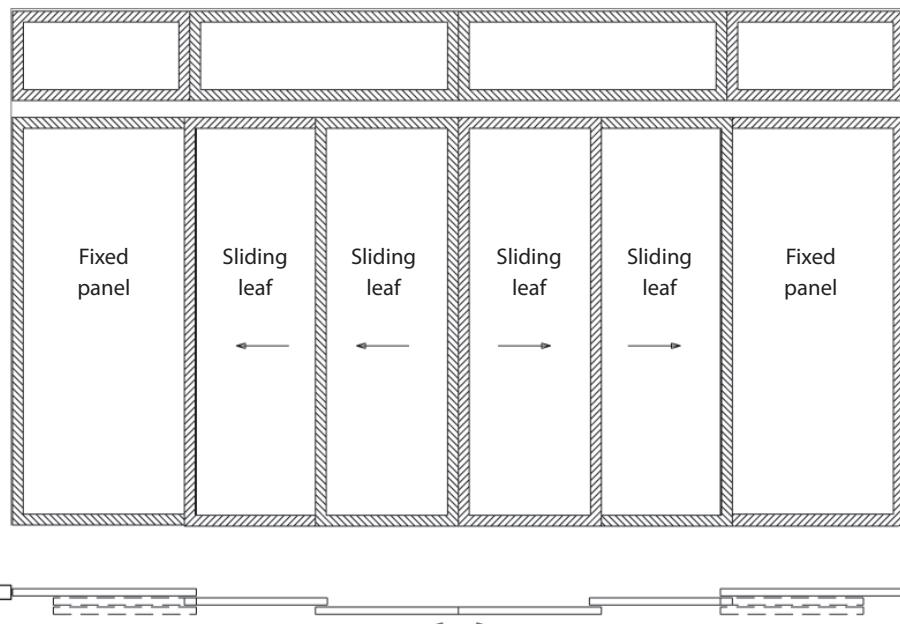**SLIMDRIVE SLT WITH IGG**

## GEZE Manual sliding wall system MSW with IGG

### Transparent partition wall

GEZE MSW is the manual sliding wall system for transparent separation of rooms by means of moveable glass elements. A flexible modular system and the integration of leaf elements of different functions offer architects and designers the freedom to realise individual sliding walls. GEZE MSW offers optimum solutions for innovative all-glass design for pretentious building projects.

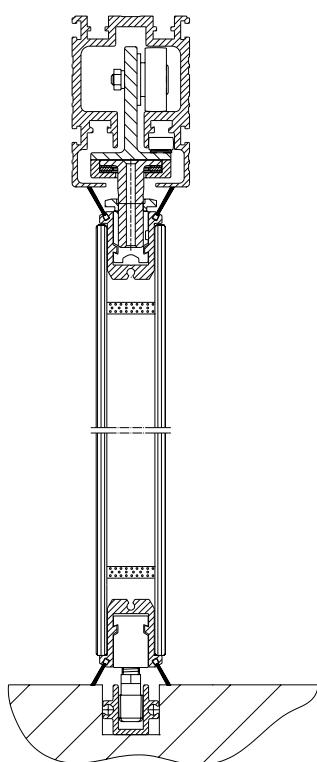

### Product features

- Excellent running properties and almost silent operation thanks to the high-quality precise roller bearings
- Minimal use of force required to manually slide the glass elements
- The profiles and fitting system are integrated invisibly between the glass panes
- Max. leaf weight up to 150 kg (with dual roller)
- Suitable for door leaf heights up to 3500 mm and widths up to 1200 mm (hinged doors) resp. 1500 mm (sliding doors)
- Circumferential perimeter printing: horizontal min. 50 mm, vertical min. 30 mm
- Standard composition of panes: 2 x 6 mm toughened safety glass ESG-H, gap between the panes 27 mm
- Types of glass: ESG-H 6 mm (green glass) and ESG-H 6 mm (clear glass) for installation heights up to 3000 mm; ESG-H 8 mm (green glass) and ESG-H 8 mm (clear glass) for installation heights from 3000 mm to 3500 mm, other glass combinations possible (e.g. laminated glass VSG or ESG)
- Sealing: horizontally brush seals, vertically silicon seals
- Continuous floor guide as an option

### Range of application

Light and transparent room partitioning in the form of an integrated all-glass system using a building block concept. The perfect partitioning wall for use in hotels, congress and shopping centres or airports.

- Combination with fixed panels, double-action, single-action, swing doors and sliding doors possible

## GEZE Perlan 140 with IGG

### Proven, robust and durable

GEZE Perlan 140 is a roller-guided sliding door system suitable for single, multiple and synchronous sliding doors. The elegant, understated design supports any desired spatial effect. The demanding technology, high-quality materials and first-class workmanship means that the sliding doors open with the least amount of force and make Perlan 140 the ideal solution for constant use in heavily frequented living and working areas.





### PERLAN 140 WITH IGG

#### Product features


- 4 high-quality precision ball bearings
- Optimum load distribution due to triple pendulum suspension
- Precise guiding due to special track design, no lateral contact
- Track of anodised light alloy; hanger bolts and nuts of special steel
- Outdoor installation possible
- Vertical and lateral adjustment
- Track can easily be adjusted after installation
- Types of glass: toughened safety glass ESG-H 6 mm (green glass), ESG-H 6 mm (clear glass), other glass combinations possible (e.g. laminated glass VSG or ESG)
- Even possible in combination with SoftStop

#### Range of application

- For all types of sliding doors: single, multiple leaves and synchronous
- Wall and ceiling mounting
- For doors with a leaf weight of 140 kg
- Fixed panel up to 200 kg
- Max. height 2600 mm
- With SoftStop up to 80 kg weight per leaf

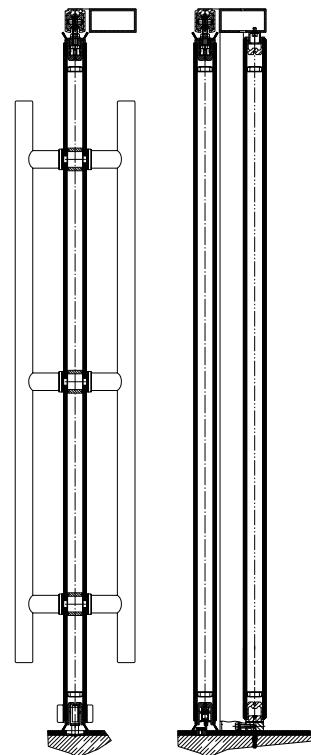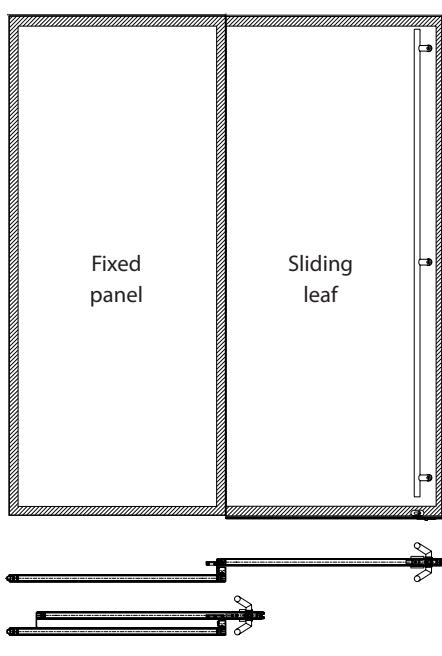**PERLAN 140 WITH IGG****Standard mounting**



The leaves can be mounted to the wall or the ceiling using attachment angles (hole interval 175 mm). The door is stopped at the top and at the bottom simultaneously by a buffer and an additional buffer that is fitted to the centre of the door or at the top.

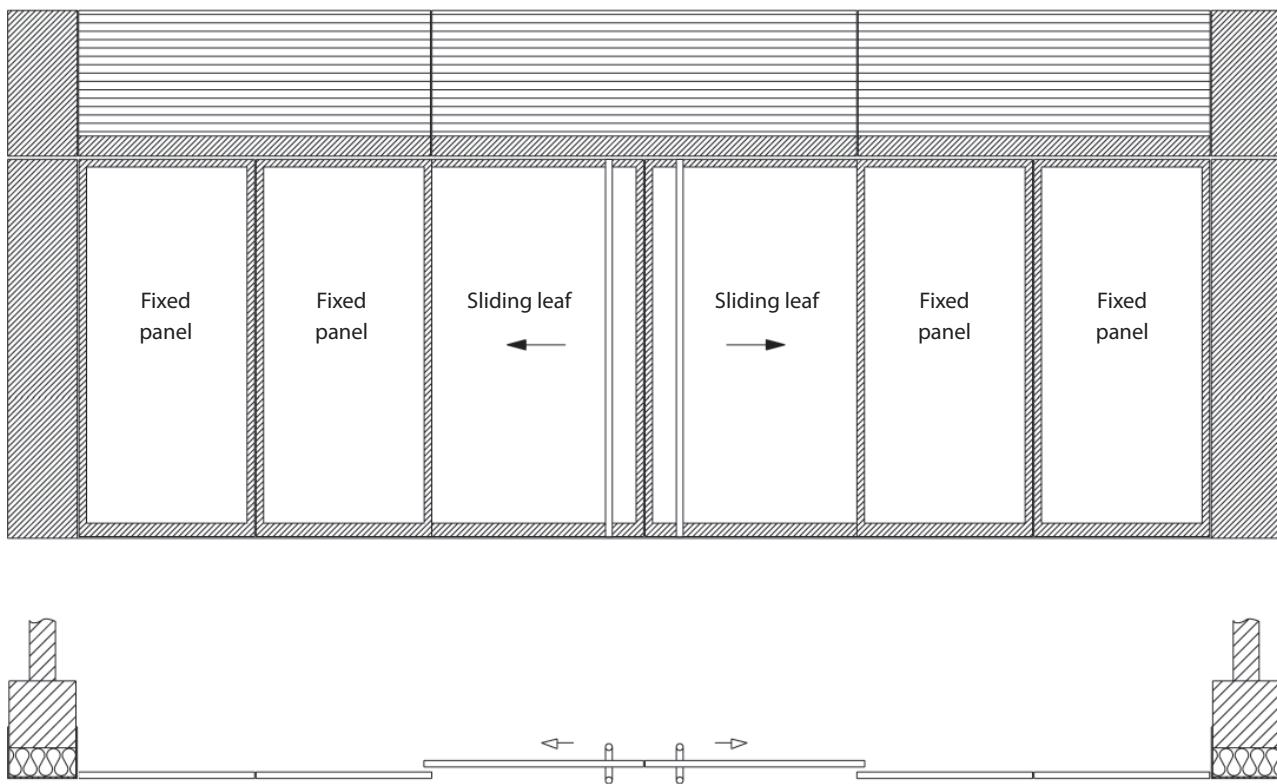

## GEZE IGG Double-action door

### Flexibel to all directions

In banks, restaurants and hotels you often need doors that can be opened to both directions. The GEZE IGG double-action door offers the required flexibility and is suitable for everyday use, simultaneously offering high-quality and transparent construction. The double-action doors can be combined with the proven GEZE automatic door opening systems.

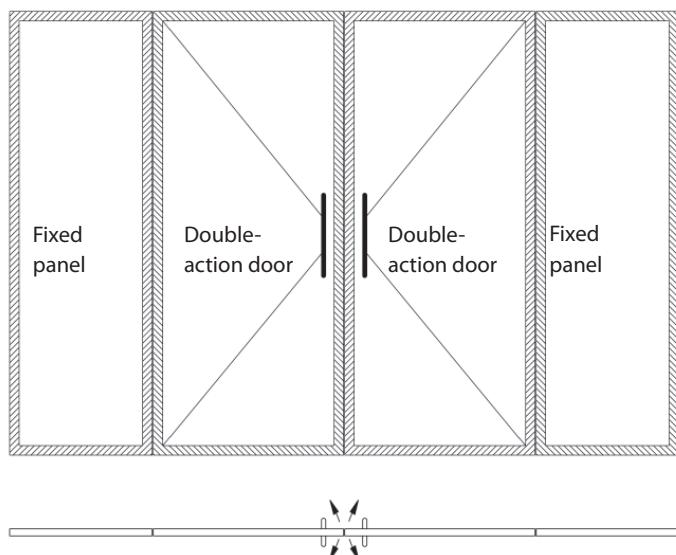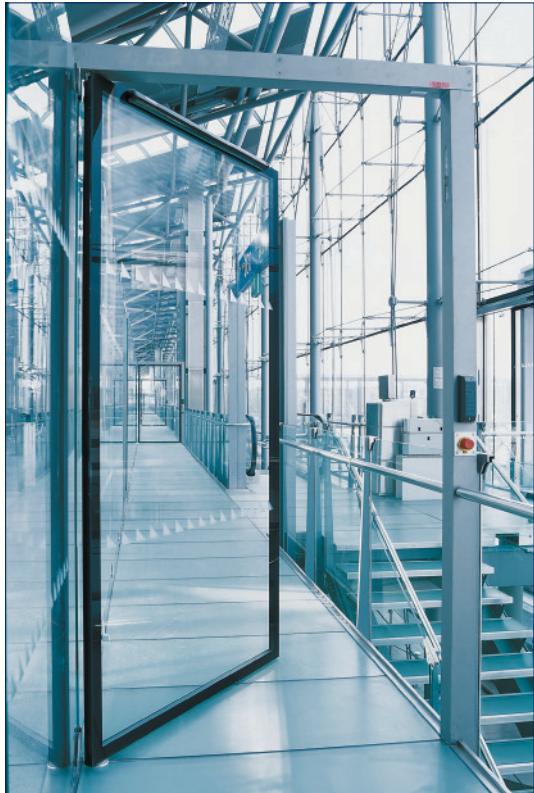


### IGG DOUBLE-ACTION DOOR    Product features

- Frameless all-glass element with fittings integrated between the panes (2 x 6 mm toughened safety glass ESG-H, gap between the panes SZR 27 mm)
- Allround perimeter printing
- Dimensions: door width max. 1250 mm, height max. 2600 mm
- Thickness of door leaf approx. 40 mm
- Max. weight of door leaf: 120 kg per leaf
- Fixed panel max. 200 kg
- Types of glass: toughened safety glass ESG-H 6 mm (green glass), ESG-H 6 mm (clear glass), other glass combinations possible (e.g. laminated glass VSG or ESG)
- Finish of spacers of ISO glazing: silver (standard), black or light grey
- Surface of integrated frame: C 35 (black)
- Types of mounting: frame, column and beam structure, wall installation
- With door closer: Floor spring TS 500 NV / TS 550 NV

## GEZE IGG Single-action door

### Simply ideal

Whether in public or private buildings: no doors are used more often than single-action doors. The GEZE IGG system allows the construction or even reconstruction of any sort of single-action doors. You are free to choose among a wide range of hinges, locks, handles, automatic closing and opening systems.

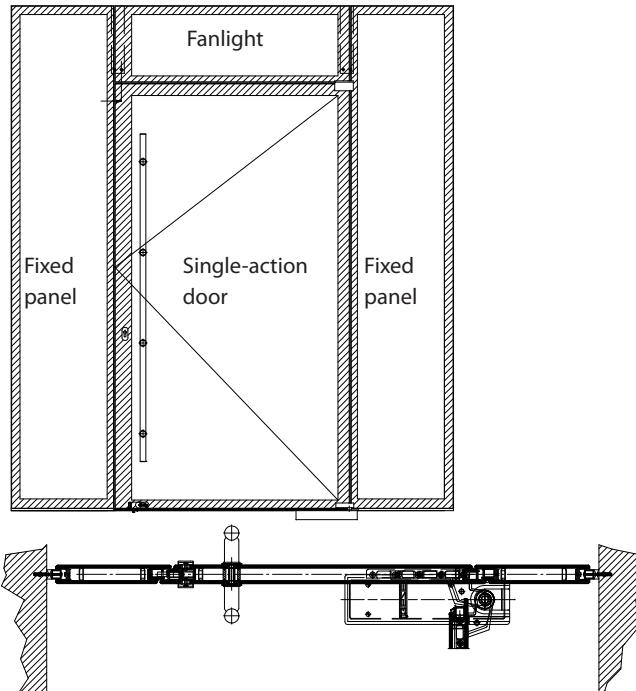

### IGG SINGLE-ACTION DOOR

### Product features

- Frameless all-glass element with fittings integrated between the panes (2 x 6 mm toughened safety glass ESG-H, gap between the panes SZR 27 mm)
- Allround perimeter printing. Width of printing depends on fitting options.
- Dimensions: door width max. 1250 mm, height max. 2600 mm
- Thickness of door leaf approx. 40 mm (ESG-H)
- Max. weight of door leaf: 120 kg per leaf
- Fixed panel max. 200 kg
- Types of glass: toughened safety glass ESG-H 6 mm (green glass), ESG-H 6 mm (clear glass), other glass combinations possible (e.g. laminated glass VSG or ESG)
- Finish of spacer of ISO glazing: silver (standard), black or light grey
- Surface of integrated frame: C 35 (black)
- Types of mounting: frame, column and beam structure, wall installation
- With door closer: Overhead door closer TS 5000/TS 3000 V, floor spring TS 550 / TS 550 E

<b>GEZE GmbH</b> <b>P.O. Box 1363</b> <b>71226 Leonberg</b> <b>Germany</b>  <b>GEZE GmbH</b> <b>Reinhold-Vöster-Straße 21-29</b> <b>71229 Leonberg</b> <b>Germany</b> Telefon +49 (0) 7152-203-0 Telefax +49 (0) 7152-203-310  <b>www.geze.com</b>	GEZE Service GmbH NL Südwest Reinhold-Vöster-Straße 25 71229 Leonberg Tel. +49 (0) 7152-92 33 34	<b>China</b> GEZE Industries (Tianjin) Co., Ltd. Shuangchenzhong Road Beichen Economic Development Area (BEADA) Tianjin 300400, P.R. China Tel. +86 (0) 22-26 97 39 95-0 Fax +86 (0) 22-26 97 27 02 E-Mail: Sales-info@geze.com.cn	<b>India</b> GEZE India Private Ltd. MF 2 & 3, Guindy Industrial Estate Ekkattuthangal Chennai 600 097 Tamilnadu Tel. +91 (0) 44 30 61 69 00 Fax +91 (0) 44 30 61 69 01 E-Mail: office-india@geze.com	<b>Scandinavia – Finland</b> Branch office of GEZE Scandinavia AB Herralantie 824 Postbox 20 15871 Hollola Tel. +358 (0) 10-40 05 100 Fax +358 (0) 10-40 05 120 E-Mail: finland.se@geze.com
<b>Germany</b> GEZE Sonderkonstruktionen GmbH Planken 1 97944 Boxberg-Schweigern Tel. +49 (0) 7930-92 94-0 Fax +49 (0) 7930-92 94-10 E-Mail: sk.de@geze.com	GEZE Service GmbH NL Mitte Feldbergstraße 59 61440 Oberursel Tel. +49 (0) 6171-63 327-0	GEZE Industries (Tianjin) Co., Ltd. Branch Office Shanghai Unit 25N, Cross Region Plaza No 899, Ling Ling Road, XuHui District 200030 Shanghai, P.R China Tel. +86 (0) 21-523 40 960 Fax +86 (0) 21-644 72 007 E-Mail: chinasales@geze.com.cn	<b>Italy</b> GEZE Italia Srl Via Giotto, 4 20040 Cambiago (MI) Tel. +39 (0) 29 50 695-11 Fax +39 (0) 29 50 695-33 E-Mail: italia.it@geze.com	<b>Scandinavia – Denmark</b> GEZE Danmark Branch office of GEZE Scandinavia AB Mårkærvej 13 J-K 2630 Taastrup Tel. +45 (0) 46-32 33 24 Fax +45 (0) 46-32 33 26 E-Mail: danmark.se@geze.com
<b>Germany</b> Niederlassung Nord/Ost Bühringstraße 8 13086 Berlin (Weissensee) Tel. +49 (0) 30-47 89 90-0 Fax +49 (0) 30-47 89 90-17 E-Mail: berlin.de@geze.com	GEZE Service GmbH NL Süd Parkring 17 85748 Garching bei München Tel. +49 (0) 89-120 07 42-0	GEZE Industries (Tianjin) Co., Ltd. Branch Office Guangzhou Room 17C3 Everbright Bank Building, No.689 Tian He Bei Road 510630 Guangzhou P.R. China Tel. +86 (0) 20-38 73 18 42 Fax +86 (0) 20-38 73 18 34 E-Mail: chinasales@geze.com.cn	GEZE Engineering Roma Srl Via Lucrezia Romana, 91 00178 Roma Tel. +39 (0) 6-72 65 311 Fax +39 (0) 6-72 65 3136 E-Mail: roma@geze.biz	<b>South Africa</b> DCLSA Distributors (Pty) Ltd. 118 Richards Drive, Halfway House, Ext 111 P.O. Box 7934, Midrand 1685 Tel. +27 (0) 1131 58 286 Fax +27 (0) 1131 58 261 E-Mail: info@dclsa.co.za
<b>GEZE GmbH</b> Niederlassung West Nordsternstraße 65 45329 Essen Tel. +49 (0) 201-83 082-0 Fax +49 (0) 201-83 082-20 E-Mail: essen.de@geze.com	<b>Austria</b> GEZE Austria Wiener Bundesstrasse 85 A-5300 Hallwang Tel: +43/6225/87180 Fax: +43/6225/87180-299	GEZE Industries (Tianjin) Co., Ltd. Branch Office Beijing Room 1001, Tower D Sanlitun SOHO No. 8, Gongti North Road, Chaoyang District 100027 Beijing, P.R.China Tel. +86 (0) 10-59 35 93 00 Fax +86 (0) 10-59 35 93 22 E-Mail: chinasales@geze.com.cn	<b>Poland</b> GEZE Polska Sp.z o.o. ul. Annopol 21 03-236 Warszawa Tel. +48 (0) 22 440 4 440 Fax +48 (0) 22 440 4 400 E-Mail: geze.pl@geze.com	<b>Switzerland</b> GEZE Schweiz AG Bodenackerstrasse 79 4657 Dulliken Tel. +41 (0) 62-285 54 00 Fax +41 (0) 62-285 54 01 E-Mail: schweiz.ch@geze.com
<b>GEZE GmbH</b> Niederlassung Mitte Adenauerallee 2 61440 Oberursel (b. Frankfurt) Tel. +49 (0) 6171-63 610-0 Fax +49 (0) 6171-63 610-1 E-Mail: frankfurt.de@geze.com	<b>Baltic States</b> GEZE GmbH Baltic States office Dzelzavas iela 120 S 1021 Riga Tel. +371 (0) 67 89 60 35 Fax +371 (0) 67 89 60 36 E-Mail: office-latvia@geze.com	GEZE Industries (Tianjin) Co., Ltd. Branch Office Beijing Room 1001, Tower D Sanlitun SOHO No. 8, Gongti North Road, Chaoyang District 100027 Beijing, P.R.China Tel. +86 (0) 10-59 35 93 00 Fax +86 (0) 10-59 35 93 22 E-Mail: chinasales@geze.com.cn	<b>Romania</b> GEZE Romania s.r.l. IRIDE Business Park, Str. Dimitrie Pompeiu nr. 9-9a, Building 10, Level 2, Sector 2, 02035 Bucharest Tel.: +40 (0) 21 25 07 750 Fax: +40 (0) 21 25 07 750 E-Mail: office-romania@geze.com	<b>Turkey</b> GEZE GmbH Türkiye - İstanbul İrtibat Bürosu Ataşehir Bulvarı, Ata 2/3 Plaza Kat: 9 D: 84 Ataşehir Kadıköy / İstanbul Tel. + 90 (0) 21 64 55 43 15 Fax + 90 (0) 21 64 55 82 15 E-Mail: office-turkey@geze.com
<b>GEZE GmbH</b> Niederlassung Süd Breitwiesenstraße 8 71229 Leonberg Tel. +49 (0) 7152-203-594 Fax +49 (0) 7152-203-438 E-Mail: leonberg.de@geze.com	<b>Benelux</b> GEZE Benelux B.V. Leemkuil 1 Industrieterrein Kapelbeemd 5626 EA Eindhoven Tel. +31 (0) 40-26 290-80 Fax +31 (0) 40-26 290-85 E-Mail: benelux.nl@geze.com	GEZE France S.A.R.L. ZAC de l'Orme Rond RN 19 77170 Servon Tel. +33 (0) 1-60 62 60-70 Fax +33 (0) 1-60 62 60-71 E-Mail: france.fr@geze.com	<b>Russian Federation</b> GEZE GmbH Representative Office Russia Kolodesnj pereulok3, str. 25 Office Nr. 5201-5203 107076 Moskau Tel. +7 (0) 49 55 89 90 52 Fax +7 (0) 49 55 89 90 51 E-Mail: office-russia@geze.com	<b>Ukraine</b> GEZE Ukraine TOV ul. Viskoznaya, 17, Building 93-B, Office 12 02094 Kiev Tel./Fax +38 (0) 44 501 22 25 Tel. +38 (0) 44 499 77 25 E-Mail: office-ukraine@geze.com
<b>GEZE GmbH</b> Niederlassung Nord Bühringstraße 8 13086 Berlin (Weissensee) Tel. +49 (0) 30-47 89 90-0 Fax +49 (0) 30-47 89 90-17 E-Mail: berlin.de@geze.com	<b>Bulgaria</b> GEZE Bulgaria - Trade Representative Office 61 Pirinski Prohod, entrance „B“, 4th floor, office 5, 1680 Sofia Tel. +359 (0) 24 70 43 73 Fax +359 (0) 24 70 62 62 E-Mail: office-bulgaria@geze.com	GEZE Hungary Kft. Bartók Béla út 105-113. Budapest H-1115 Tel. +36 (1) 481 4670 Fax +36 (1) 481 4671 E-Mail: office-hungary@geze.com	<b>Hungary</b> GEZE Scandinavia – Sweden GEZE Scandinavia AB Mallslingan 10 Box 7060 18711 Täby, Sweden Tel. +46 (0) 8-7323-400 Fax +46 (0) 8-7323-499 E-Mail: sverige.se@geze.com	<b>Scandinavia – Sweden</b> GEZE Scandinavia AB Mallslingan 10 Box 7060 18711 Täby, Sweden Tel. +46 (0) 8-7323-400 Fax +46 (0) 8-7323-499 E-Mail: sverige.se@geze.com
<b>GEZE REPRESENTATIVE</b>	<b>Iberia</b> GEZE Iberia S.R.L. Pol. Ind. El Pla C/Comerc, 2-22, Nave 12 08980 Sant Feliu de Llobregat (Barcelona) Tel. +34 9-02 19 40 36 Fax +34 9-02 19 40 35 E-Mail: info@geze.es	<b>Scandinavia – Norway</b> GEZE Scandinavia AB avd. Norge Industriveien 34 B 2073 Dal Tel. +47 (0) 639-57 200 Fax +47 (0) 639-57 173 E-Mail: norge.se@geze.com	<b>United Arab Emirates/GCC</b> GEZE Middle East P.O. Box 17903 Jebel Ali Free Zone Dubai Tel. +971 (0) 4-88 33 112 Fax +971 (0) 4-88 33 240 E-Mail: geze@emirates.net.ae	<b>United Kingdom</b> GEZE UK Ltd. Blenheim Way Fradley Park Lichfield Staffordshire WS13 8SY Tel. +44 (0) 1543 44 30 00 Fax +44 (0) 1543 44 30 01 E-Mail: info.uk@geze.com